

scheepvaartinspectie

AMP/RvL

Philadelphia Resins Corporation
P.O.Box 454
20 Commerce Drive
MONTGOMERYVILLE PA 18936
U.S.A.

Your letter of: November 26, 1984

~~Uitsluitend:~~

Your ref.: drp

~~Uitsluitend:~~

Subject: Chockfast Gray Epoxy Resin
~~Uitsluitend:~~ Chocks for Non-Critically
Aligned Machinery.

rijswijk, 8 January 1985

ons kenmerk: PNW/SP-50068/85

toestelnummer: 316

bijlage(n):

verzonden:

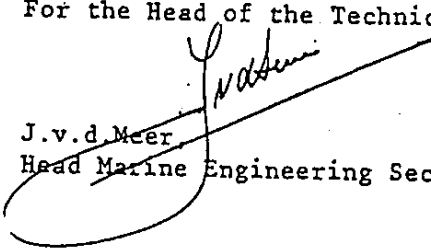
with reference to your abovementioned letter I can inform you as follows.

To the application of your chocking material "Chockfast Gray" for auxiliary equipment such as deck winches, pumps, machinery on common bedplate, etc. on board of ships to which the Netherlands Shipping Act is applicable, are no objections from the side of the Netherlands Shipping Inspectorate, provided the conditions mentioned in your Technical Bulletin no.652 A are followed.

The requirements of the Classification Society supervising the construction and maintenance of the ship concerned shall be met as well.

In general, the conditions imposed for "Chockfast Grange" are applicable for "Chock Gray".

For the Head of the Technical Division,


J.v.d. Meer
Head Marine Engineering Section.